


SupportRail™ System

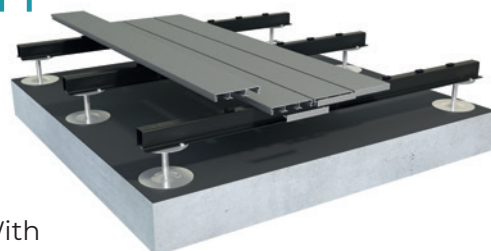

Overview

A durable, non-combustible sub-rail and pedestal system designed for the MyDek decking system. With aluminium SupportRail™ and stainless steel height-adjustable pedestals, the MyDek SupportRail™ System offers unrivalled speed, accuracy and peace of mind.

With virtually tool-free installation and large, circular base plates, the system is suitable for use on flat roof waterproofing, inset balconies and roof terraces with buildup heights from 80-300mm.

FEATURES:

- Non-combustible
- Lightweight
- Concealed fixings
- 30 year warranty
- 60 year design life

DIMENSIONS:

SupportRail™	55mm deep, 2.4m lengths
Pedestal	130mm dia baseplate with height options from 80-300mm ⁽¹⁾
Weight	2.89kg/sqm ⁽²⁾

(1) including 20mm MyDek decking board (2) 54mm SupportRail™ at 600mm centres and Pedestals at 1200mm centres

MATERIAL:

SupportRail™	Aluminium grade 1050
Pedestal	Stainless steel A2 / 303

FINISH:

SupportRail™	Black Coated
Pedestal	Self colour



Fairbourne Drive, Milton Keynes MK10 9RG

T: +44 (0)3300 94 94 11

E: sales@mydek.com


www.mydek.com

PRODUCT CODES:

SR07	SupportRail™ 54mm	SP02	Adjustable SupportPedestal
SR14	SupportRail™ 85mm		
SR12	SupportRail™ 30mm		

STRENGTH:

Deflection under load (tons)* for 55mm SupportRail™ with pedestals at 1200mm centres

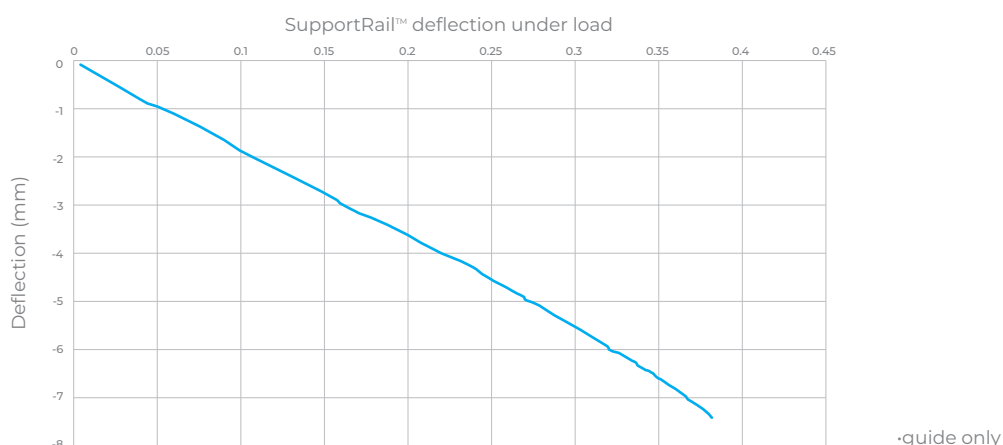

PERFORMANCE STANDARDS:

QUALITY	STANDARD	VALUE	LIMIT
Deflection – 80KG at 1200mm pedestal spacing		EN310	2.1mm
-			
Deflection – 2KN at 1200mm pedestal spacing		EN310	4.9mm
<5mm			
Coefficient of thermal expansion	N/A	0.024mm/m/°C	-
Coating Durability	EN12206, EN13438	Qualicoat Class 2	-
Fire test (polyester powder coated)	EN 13501 – 1 A1:2013	A2 – s1, d0	A2-s1,d0
Coating Adhesion	ISO-0 ASTM-5B	No separation	-

COLOUR RANGE:

For full colour range of non-slip textured powder coatings visit www.mydek.com.
Colour codes are represented by the last four characters in the product code.



Fairbourne Drive, Milton Keynes MK10 9RG

T: +44 (0)3300 94 94 11

E: sales@mydek.com

www.mydek.com

MYDEK®

Non-combustible decking systems

APPLICATIONS:

For use on balconies, walkways, roof terraces, leisure areas and patios environments.

INSTALLATION:

Fitted to flat roof or terrace areas with height buildup requirements between 80 and 300mm.

STORAGE AND HANDLING:

Profiles are packaged with protection against scratching and contamination, and supplied with appropriate support (e.g. stillage or pallet). Ensure that this level of protection is maintained until installation, including storage in dry conditions and support along the length of the profiles. Improper storage may lead to damage that falls outside the warranty.

ACCESSORIES:

For full range of accessories visit www.mydek.com

MANUFACTURER:

MyDek Limited
Fairbourne Drive
Milton Keynes
MK10 9RG

E: sales@mydek.com
T: **+44 (0)3300 94 94 11**

www.mydek.com

Summary

Smart.

Under normal usage, MyDek is easy to maintain - simply wash the deck surface as needed without abrasive chemicals. MyDek is one of the lowest-maintenance systems available.

The unique ClipRail™ and SupportRail™ systems make MyDek installation fast and simple.

Safe.

All aluminium used to create MyDek is compliant with current industry and manufacturing standards. The products are fully tested for durability, deflection and slip resistance. All MyDek products are certified to the relevant fire standards.

Sustainable.

The 60-year service life and ability to be recycled make MyDek a sustainable building feature. The longer life cycle reduces the energy required to produce replacements.

Aluminium wastage created through any of the manufacturing process is fully recyclable and is used to create other aluminium products.



Fairbourne Drive, Milton Keynes MK10 9RG

T: **+44 (0)3300 94 94 11**

E: sales@mydek.com

www.mydek.com