


## Vista Decking System

### Overview

A durable, non-combustible, aluminium decking system designed to enhance balconies and terraces, available in a range of standard finishes.

Available with as a complete decking system with accessories to facilitate fast and accurate installation, MyDek offers unrivalled speed, accuracy and choice in decking solutions.

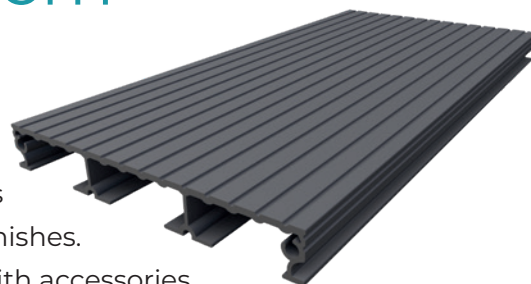

#### FEATURES:

- Fully certified
- Non-combustible
- Lightweight
- Concealed fixings
- Slip resistant
- 30 year warranty
- 60 year design life

#### DIMENSIONS:

Board width x depth	144 x 20mm
Board length	4m or cut-to-length (subject to conditions)
Weight	11.22kg/sqm

#### MATERIAL:

Board	Aluminium grade 6063-T6
Density ( $\rho$ )	2.69 g/cm <sup>3</sup>
Expansion allowance	2mm per linear metre
Finish	Polyester Powder Coating – 80micron slip-resistant
End Cap	Aluminium grade LM24
SupportRail™	Aluminium grade 5251 (structural grade)

#### PRODUCT CODES:

<b>BD04</b>	Decking board only	<b>SR07</b>	SupportRail™ 54mm
<b>CB01</b>	Basic Clip (screw-fixed)	<b>SP02</b>	SupportPedestal
<b>SR06</b>	ClipRail™ 20 x 40mm		



Fairbourne Drive, Milton Keynes MK10 9RG


T: **+44 (0)3300 94 94 11**

E: [sales@mydek.com](mailto:sales@mydek.com)

[www.mydek.com](http://www.mydek.com)

## STRENGTH:

Deflection under load for various joist centres\*

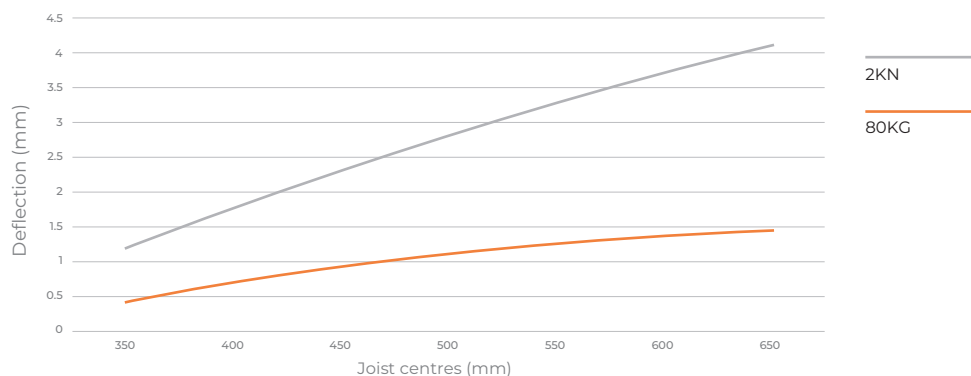

## PERFORMANCE STANDARDS:

QUALITY	STANDARD	VALUE	LIMIT
Deflection – 80KG at 500mm span	EN310	1.1mm	-
Deflection – 2KN at 500mm span	EN310	2.9mm	<5mm
Slip resistance - Wet	BS7976 -2 Pendulum Slip Test	39.5 PTV	>36
Slip resistance - Dry		59 PTV	
Coefficient of thermal expansion	N/A	0.024mm/m/°C	-
Coating Durability	EN12206, EN13438	Qualicoat Class 2	-
Accelerated wear test (biomechanical - see appendix 1.1)	TM391:2016	'Very Slight' at 50K 'Slight' at 100K	-
Furniture leg test (scratching)	EN424:2001	No damage Slight transfer	
Fire test (polyester powder coated)	EN 13501 – 1 A1:2013	A2 – s1, d0	A2 – s1, d0
Coating Adhesion	ISO-0 ASTM-5B	No separation	-
UV Stability	ISO2810	Class 2	3-year Florida

## COLOUR RANGE:

For full colour range of non-slip textured powder coatings visit [www.mydek.com](http://www.mydek.com).  
Colour codes are represented by the last four characters in the product code.

## APPLICATIONS:

For use on balconies, walkways, roof terraces, leisure areas, patios and poolside environments.



Fairbourne Drive, Milton Keynes MK10 9RG

T: +44 (0)3300 94 94 11

E: [sales@mydek.com](mailto:sales@mydek.com)

[www.mydek.com](http://www.mydek.com)

# MYDEK®

Non-combustible decking systems

---

## INSTALLATION:

Mounted directly onto joists with Edge Clips or onto MyDek SupportRail™ joist or bearers.

---

## STORAGE AND HANDLING:

Profiles are packaged with protection against scratching and contamination, and supplied with appropriate support (e.g. stillage or pallet). Ensure that this level of protection is maintained until installation, including storage in dry conditions and support along the length of the profiles. Improper storage may lead to damage that falls outside the warranty.

---

## ACCESSORIES:

For full range of accessories visit [www.mydek.com](http://www.mydek.com)

---

## MANUFACTURER:

**MyDek Limited**  
Fairbourne Drive  
Milton Keynes  
MK10 9RG

E: [sales@mydek.com](mailto:sales@mydek.com)  
T: **+44 (0)3300 94 94 11**  
[www.mydek.com](http://www.mydek.com)

## Summary

### Smart.

Under normal usage, MyDek is easy to maintain - simply wash the deck surface as needed without abrasive chemicals. MyDek is one of the lowest-maintenance systems available.

The unique ClipRail™ and SupportRail™ systems make MyDek installation fast and simple.

### Safe.

All aluminium used to create MyDek is compliant with current industry and manufacturing standards. The products are fully tested for durability, deflection and slip resistance. All MyDek products are certified to the relevant fire standards.

### Sustainable.

The 60-year service life and ability to be recycled make MyDek a sustainable building feature. The longer life cycle reduces the energy required to produce replacements.

Aluminium wastage created through any of the manufacturing process is fully recyclable and is used to create other aluminium products.



Fairbourne Drive, Milton Keynes MK10 9RG

T: **+44 (0)3300 94 94 11**

E: [sales@mydek.com](mailto:sales@mydek.com)

[www.mydek.com](http://www.mydek.com)

## Appendix

### 1. BIOMECHANICAL ACCELERATED WEAR TEST SATRA TM391:2016

This test has been carried out in accordance with SATRA TM391:2016 for assessing floor coverings using a walking machine, where a standard shoe (having a patterned sole with a tread depth of 5mm ± 0.5mm and Shore A hardness of 54 is mounted on a foot form that is attached to a walking machine. The flooring specimen is subjected to a cyclic walking action from the standard shoe, where the specimen rotates incrementally whilst the forepart is in contact with the sample. These individual footsteps are designed to replicate a mixture of walking in a straight line and turning a corner. The flooring sample under test rotates such that it completes a 360° rotation every 150 footfalls.

### 2. FURNITURE LEG TEST EN 424:2001

This test simulates the movement of furniture or the likes on floor surfaces, and assesses the impact on the finish of the product both in terms of damage to the surface and transfer of marking onto the surface.

**Results: EN 424:2001 – Resilient floor coverings –  
Determination of the effect of simulated  
movement of a furniture leg. <sup>(2)(3)</sup>**

		Direction of manufacture	90° to the direction of manufacture
Type 0 with an applied mass of 32kg	Flatness Deterioration	None	None
	Damage which partially destroys surface	None	None
	Cuts of varying depth	None	None
	Penetrating Edges	None	None
	Transfer of brass	None	None
Type 2 with an applied mass of 100kg	Flatness Deterioration	None	None
	Damage which partially destroys surface	None	None
	Cuts of varying depth	None	None
	Penetrating Edges	None	None
	Transfer of brass	Very slight	Slight
Type 3 with an applied mass of 70kg	Flatness Deterioration	None	None
	Damage which partially destroys surface	None	None
	Cuts of varying depth	None	None
	Penetrating Edges	None	None
	Transfer of brass	None	Slight



Fairbourne Drive, Milton Keynes MK10 9RG

T: +44 (0)3300 94 94 11

E: [sales@mydek.com](mailto:sales@mydek.com)

[www.mydek.com](http://www.mydek.com)