


LuxuraClad Support System

Overview

A1 Fire rated, non-combustible aluminium support system with a unique groove to mount fast-install clips. Suitable for use with the MyDek LuxuraClad system.

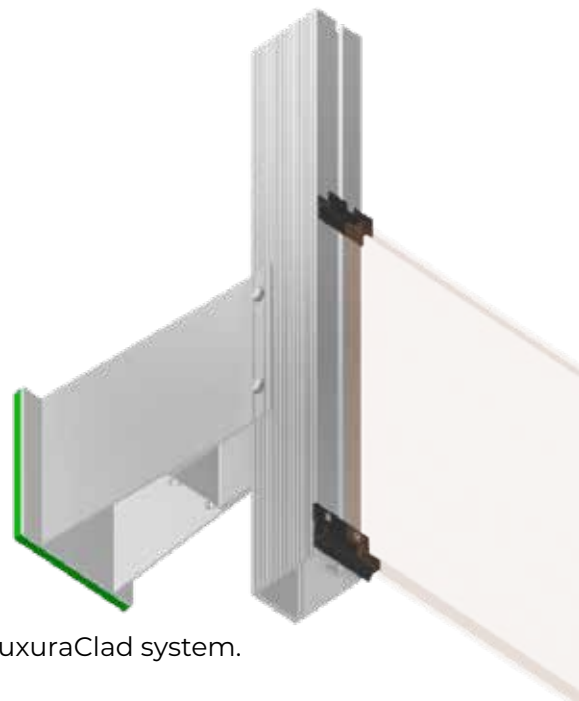

FEATURES:

- Fully certified
- Non-combustible
- Lightweight
- 30 year warranty
- 60 year design life

MATERIAL:

All components: Aluminium grade 6063-T6
Expansion allowance: 1mm per linear metre
Finish: Mill finish

HELPING HANDS:



Small
(35mm deep)



Medium
(53mm deep)



Large
(107mm deep)

EXTENDERS:



Extender
(50mm deep)



Extender
(100mm deep)

BOXRAILS:



BoxRail 35



BoxRail 60



Granville House Unit E, The Heights Business Park
High Wycombe, HP14 3BC.


T: **+44 (0)3300 94 94 11**

E: **sales@mydek.com**

www.mydek.com

DIMENSIONS & PRODUCT CODES:

Note: Construction heights in the table below include the height of the Support Cleat and BoxRail and exclude the height of the deck board.



	Helping Hands		BoxRail 35		BoxRail 60	
		Product codes	BR35		BR60	
		Height (mm)	Min	Max	Min	Max
	SF04	35	35	57	63	85
	SF01	53	53	75	63	103
	SF06	107	107	129	107	157
	CX01	50	157	179	157	207
	CX02	100	207	229	207	257

Additional extensions can be added to increase overall height

Recommended BoxRail/Helping Hands combinations



Granville House Unit E, The Heights Business Park
High Wycombe, HP14 3BC.

T: +44 (0)3300 94 94 11
E: sales@mydek.com

www.mydek.com

LOAD SPANS:

Product code	Max Support Centres	Max Overhang	Deflection at 2kN
BR35 BoxRail 35	1000mm	190mm	< 5mm
BR60 BoxRail 60	1500mm	300mm	< 5mm

PERFORMANCE STANDARDS:

QUALITY	STANDARD	VALUE	MIN. REQUIRED STANDARD
Coefficient of thermal expansion	N/A	0.024mm/m/°C	-
Fire test	EN 13501 – 1 A1:2013	A1	A2-s1,d0

APPLICATIONS:

For use on balconies, walkways, roof terraces, leisure areas and patios.

INSTALLATION:

Clipped onto Helping Hands and fixed using supplied self-drilling screws. Rail clips to adjustable Helping Hand. Contact MyDek Technical Support for support for required anchoring to the substrate

STORAGE AND HANDLING:

Profiles are packaged with protection against scratching and contamination, and supplied with appropriate support (e.g. stillage or pallet). Ensure that this level of protection is maintained until installation, including storage in dry conditions and support along the length of the profiles. Improper storage may lead to damage that falls outside the warranty.

ACCESSORIES:

For full range of accessories visit www.mydek.com



Granville House Unit E, The Heights Business Park
High Wycombe, HP14 3BG.

T: +44 (0)3300 94 94 11
E: sales@mydek.com

www.mydek.com